


INSTALLATION VERSATILITY

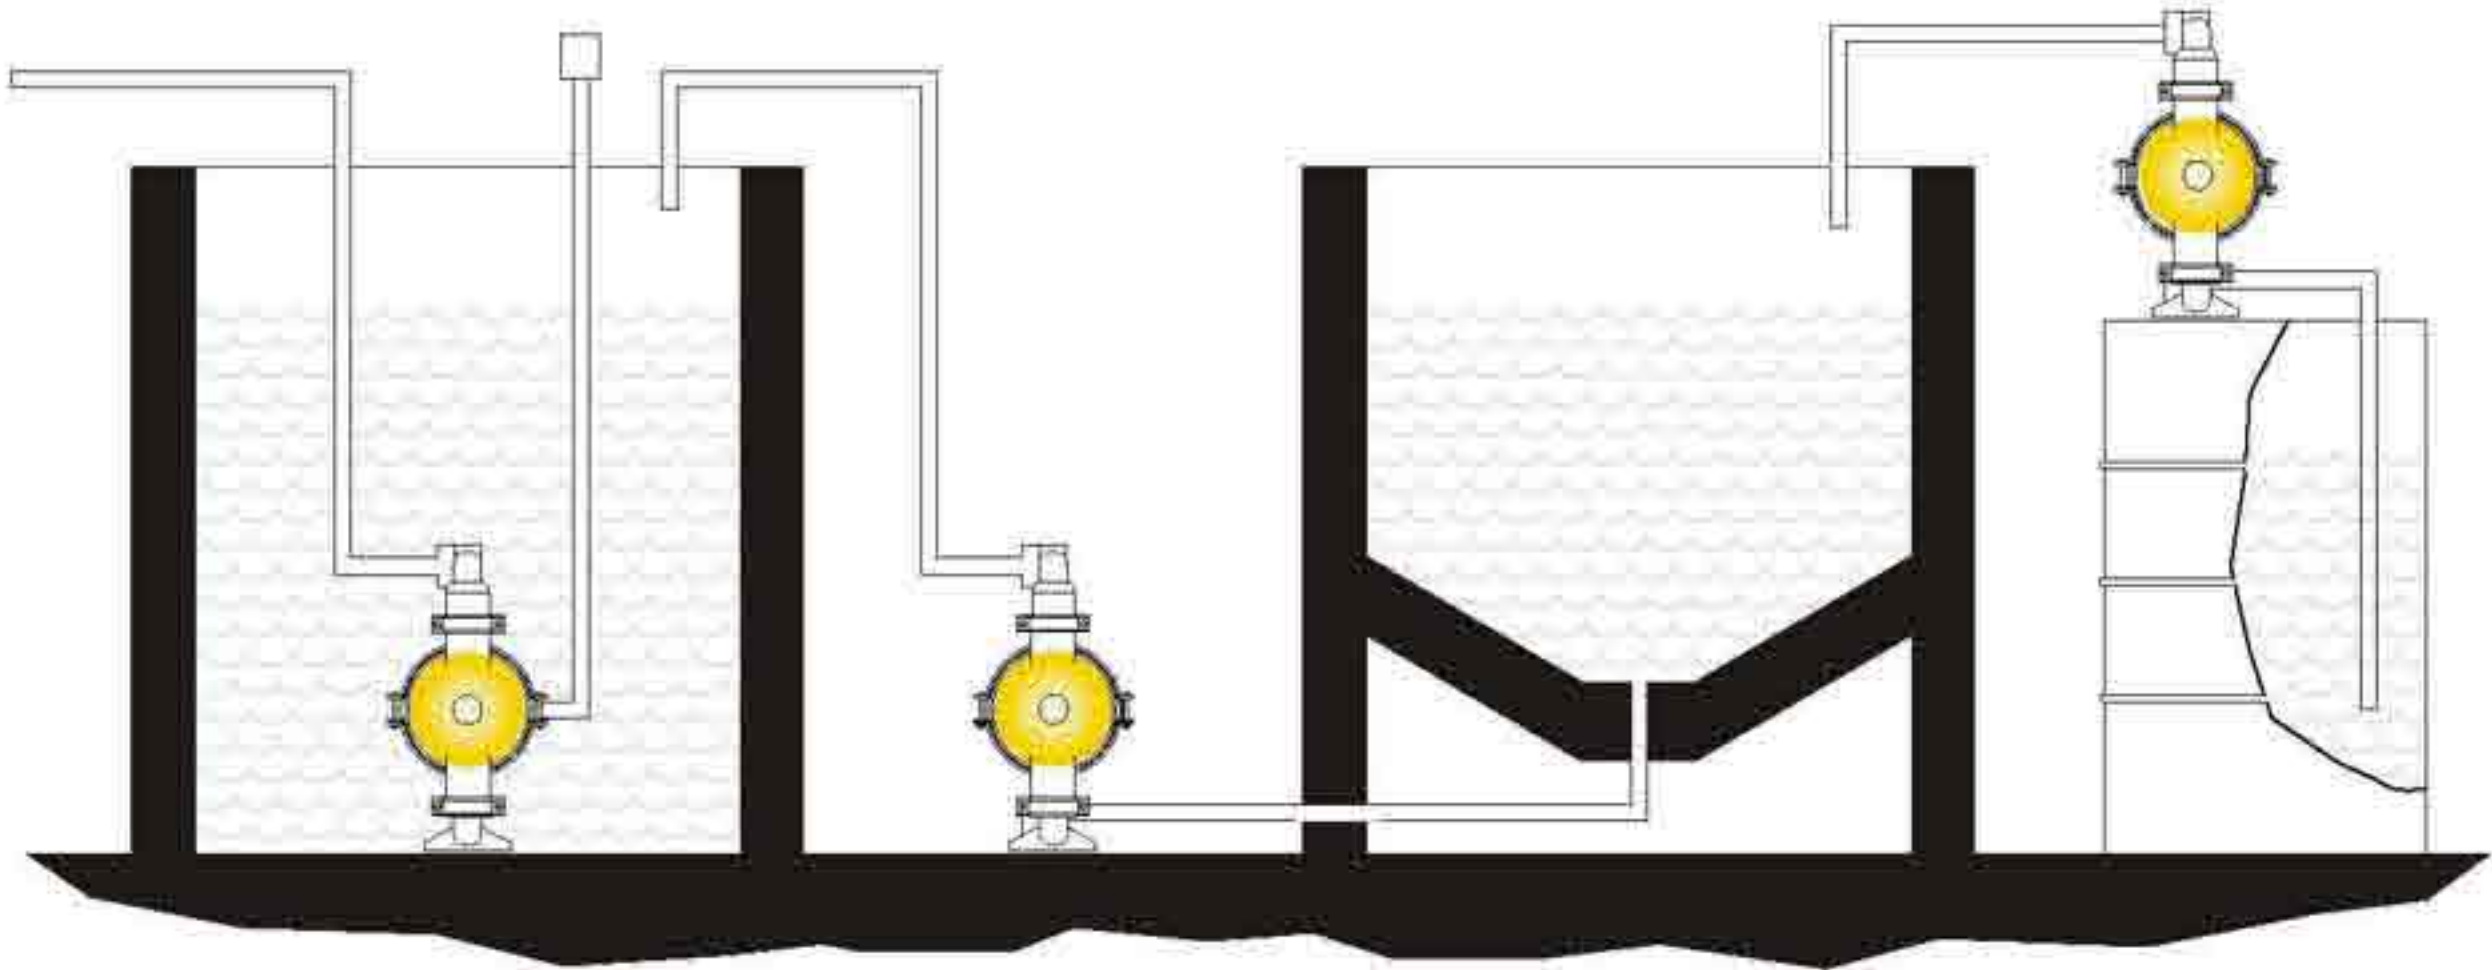

SUBMERGED

PRICE Pumps are totally submersible. It is important that the air exhaust be ported above the level of the fluid, and that the materials of construction also be compatible with the fluid that the pump is submerged in.

POSITIVE SUCTION

Pump can draw from the bottom of the vessel. Preferred installation for viscous fluids. For emptying tanks it is important to limit the inlet fluid pressure to approximately 10 PSI (0.69 bar) for Teflon diaphragms and 15 PSI (1.03 bar) for rubber and sentoprene diaphragms.

SELF PRIMING

The suction capabilities of each pump may vary due to system design, product being pumped, and pump materials of construction. Please consult the factory with specific criteria.

APPLICATION VERSATILITY

